

Features

- Center amplifying gate
- Metal case with ceramic insulator
- Low on-state and switching losses

Typical Applications

- AC controllers
- DC and AC motor control
- Controlled rectifiers

$I_{T(AV)}$ **1640A**
 V_{DRM}/V_{RRM} **3100~4200V**
 I_{TSM} **20 kA**
 I^2t **2000 10³A²S**



SYMBOL	CHARACTERISTIC	TEST CONDITIONS	$T_j(^{\circ}C)$	VALUE			UNIT
				Min	Type	Max	
$I_{T(AV)}$	Mean on-state current	180° half sine wave 50Hz Double side cooled,	125			1910	A
						1640	
V_{DRM} V_{RRM}	Repetitive peak off-state voltage Repetitive peak reverse voltage	V_{DRM}/V_{RRM} tp=10ms $V_{DSM}/V_{RSM}= V_{DRM}/V_{RRM}+100V$	125	3100		4200	V
I_{DRM} I_{RRM}	Repetitive peak current	$V_{DM}= V_{DRM}$ $V_{RM}= V_{RRM}$	125			120	mA
I_{TSM}	Surge on-state current	10ms half sine wave $V_R=0.6V_{RRM}$	125			20	kA
I^2t	I^2T for fusing coordination					2000	$A^2s \times 10^3$
V_{TO}	Threshold voltage		125			1.17	V
r_T	On-state slop resistance					0.35	mΩ
V_{TM}	Peak on-state voltage	$I_{TM}=3220A$, F=32kN	125			2.30	V
dv/dt	Critical rate of rise of off-state voltage	$V_{DM}=0.67V_{DRM}$	125			1000	V/μs
di/dt	Critical rate of rise of on-state current	$V_{DM}=67\%V_{DRM}$ to 2000A, Gate source 1.5A $t_i \leq 0.5\mu s$	125			200	A/μs
Q_{fr}	Recovery charge	$I_{TM}=2000A$, tp=2000μs, $di/dt=-20A/\mu s$, $V_R=50V$	125		2000		μC
I_{GT}	Gate trigger current	$V_A=12V$, $I_A=1A$	25	40		300	mA
V_{GT}	Gate trigger voltage			0.8		3.0	V
I_H	Holding current			20		300	mA
V_{GD}	Non-trigger gate voltage	$V_{DM}=67\%V_{DRM}$	125	0.3			V
$R_{th(j-c)}$	Thermal resistance Junction to case	At 180° sine double side cooled Clamping force 32kN				0.013	°C /W
$R_{th(c-h)}$	Thermal resistance case to heatsink					0.0035	
F_m	Mounting force			27		34	kN
T_{stg}	Stored temperature			-40		140	°C
W_t	Weight				820		g
Outline		KT60cT65					

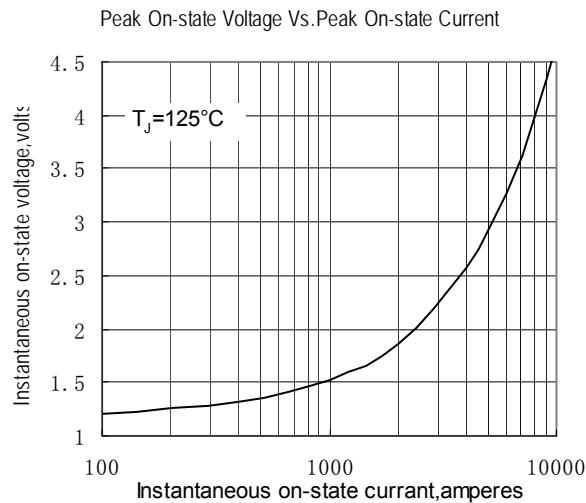


Fig.1

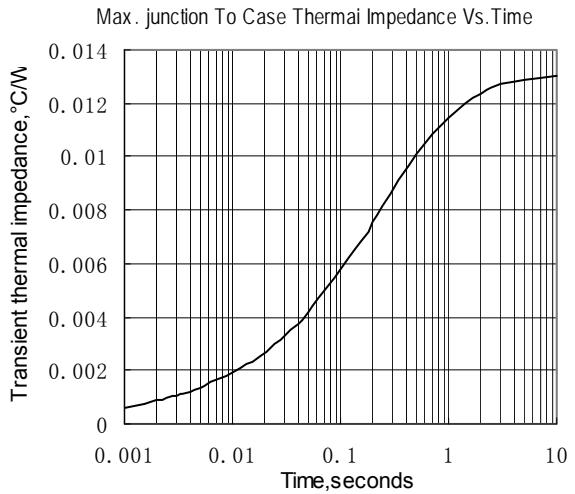


Fig.2

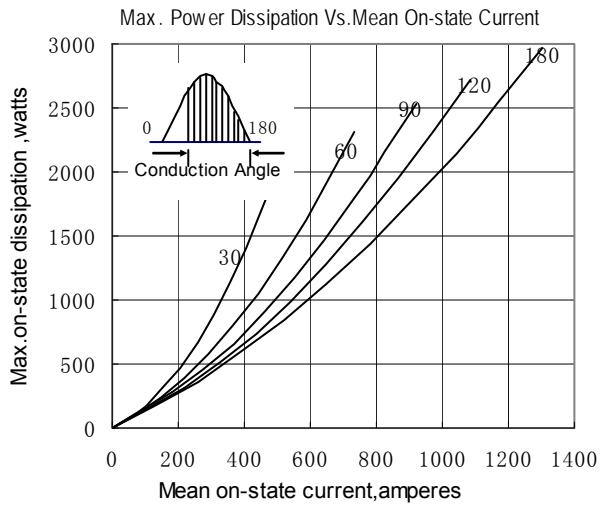


Fig.3

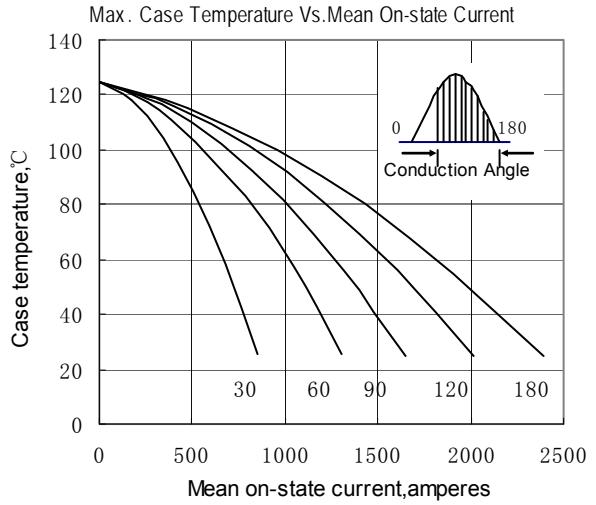
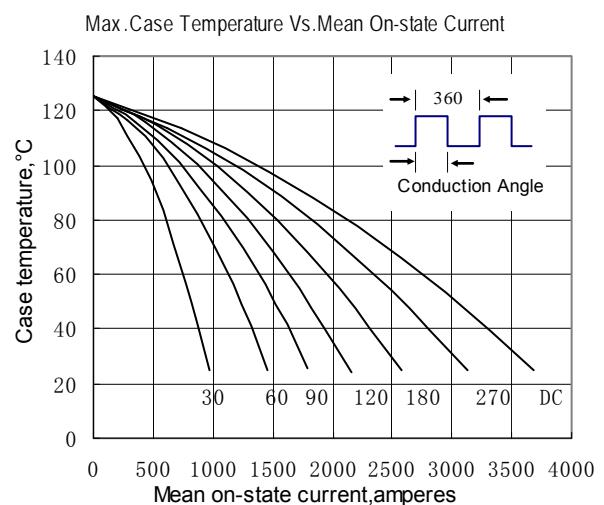
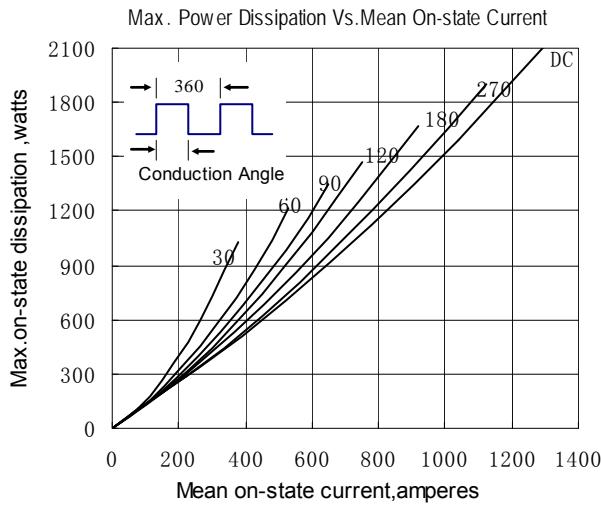


Fig.4



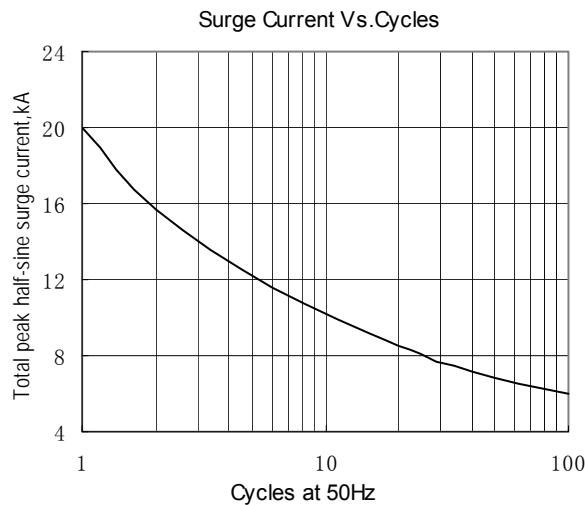


Fig.7

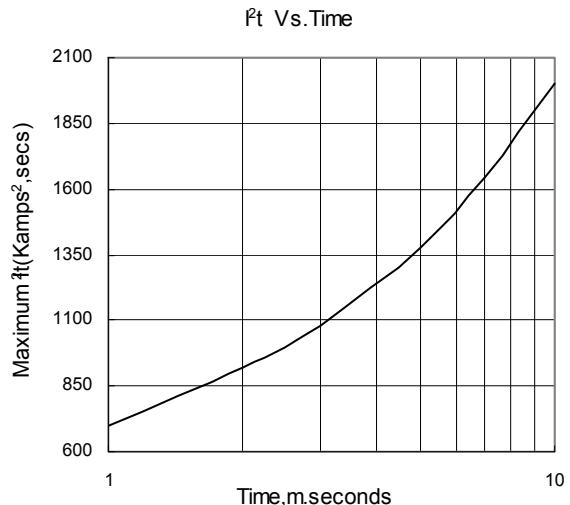


Fig.8

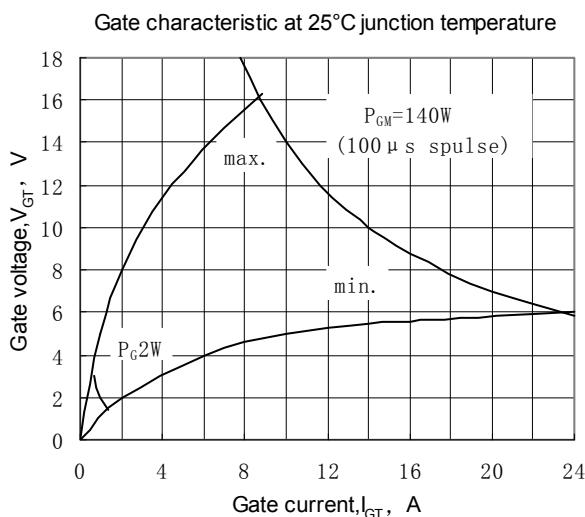


Fig.9

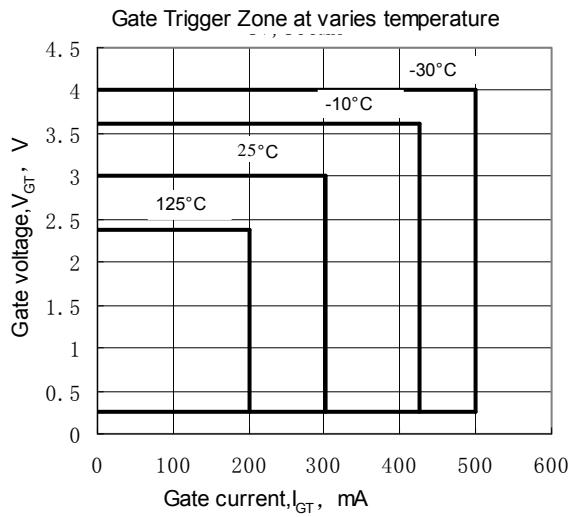


Fig.10

Outline: