

Features

- Center amplifying gate
- Metal case with ceramic insulator
- Low on-state and switching losses

Typical Applications

- AC controllers
- DC and AC motor control
- Controlled rectifiers

$I_{T(AV)}$ 2110 A
 V_{DRM}/V_{RRM} 3100-4200V
 I_{TSM} 27 kA
 I^2t 3645 $10^3 A^2s$



SYMBOL	CHARACTERISTIC	TEST CONDITIONS		T _J (°C)	VALUE			UNIT
					Min	Type	Max	
I _{T(AV)}	Mean on-state current	180° half sine wave 50Hz Double side cooled,	T _C =55°C T _C =70°C	125			2460 2110	A
V _{DRM} V _{RRM}	Repetitive peak off-state voltage Repetitive peak reverse voltage	V _{DRM} &V _{RRM} tp=10ms V _{DSM} &V _{RSM} = V _{DRM} &V _{RRM} +100V		125	3100		4200	V
I _{DRM} I _{RRM}	Repetitive peak current	V _{DM} = V _{DRM} V _{RM} = V _{RRM}		125			200	mA
I _{TSM}	Surge on-state current	10ms half sine wave		125			27	kA
I ² t	I ² T for fusing coordination	V _R =0.6V _{RRM}					3645	A ² s*10 ³
V _{TO}	Threshold voltage			125			1.15	V
r _T	On-state slop resistance						0.28	mΩ
V _{TM}	Peak on-state voltage	I _{TM} =3000A, F=40kN		125			1.99	V
dv/dt	Critical rate of rise of off-state voltage	V _{DM} =0.67V _{DRM}		125			1000	V/μs
di/dt	Critical rate of rise of on-state current	V _{DM} = 67%V _{DRM} to 2500A, Gate pulse t _r ≤0.5μs I _{GM} =1.5A		125			250	A/μs
Q _{rr}	Recovery charge	I _{TM} =2000A,tp=2000μs, di/dt=-20A/μs, V _R =50V		125		3000		μC
I _{GT}	Gate trigger current	V _A =12V, I _A =1A		25	40		300	mA
V _{GT}	Gate trigger voltage				0.8		3.0	V
I _H	Holding current				20		300	mA
V _{GD}	Non-trigger gate voltage	V _{DM} =67%V _{DRM}		125	0.3			V
R _{th(j-c)}	Thermal resistance Junction to case	At 180° sine double side cooled Clamping force 40.0kN					0.010	°C /W
R _{th(c-h)}	Thermal resistance case to heatsink						0.003	
F _m	Mounting force				35		47	kN
T _{stg}	Stored temperature				-40		140	°C
W _t	Weight					1100		g
Outline	KT73cT							

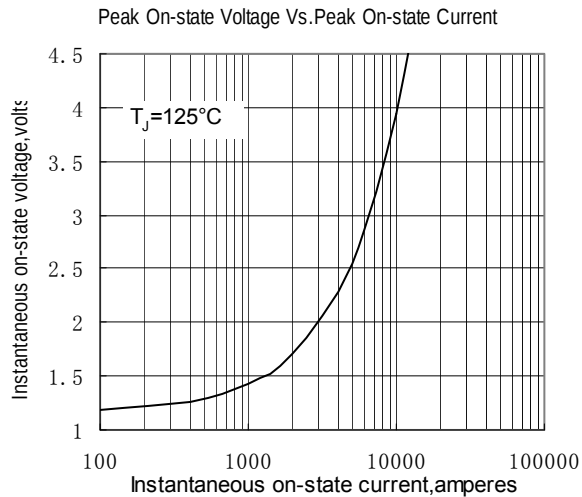


Fig.1

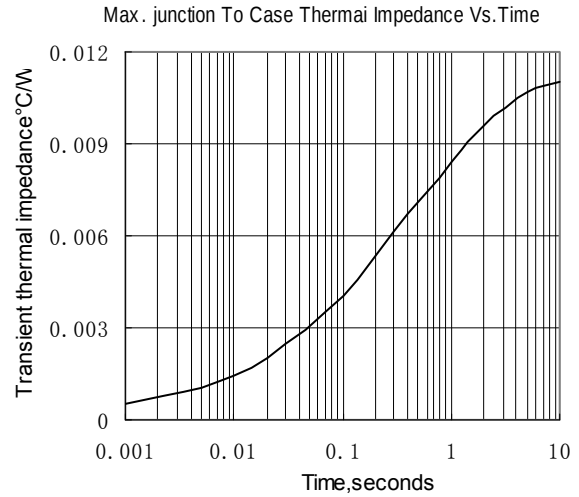


Fig.2

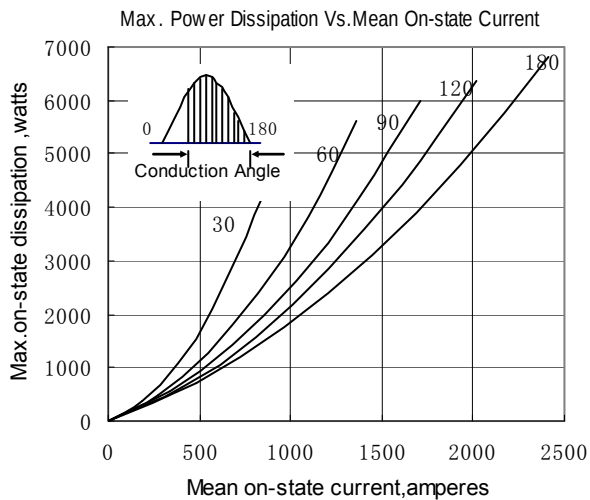


Fig.3

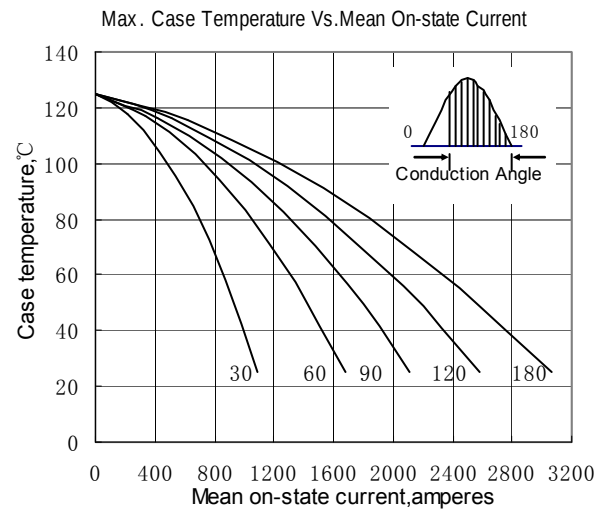


Fig.4

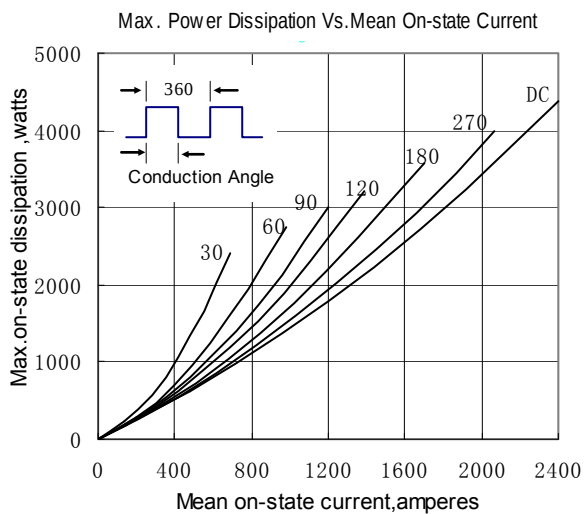


Fig.5

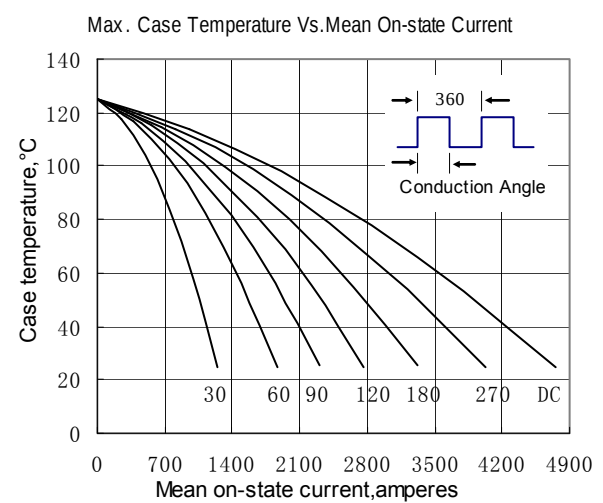


Fig.6

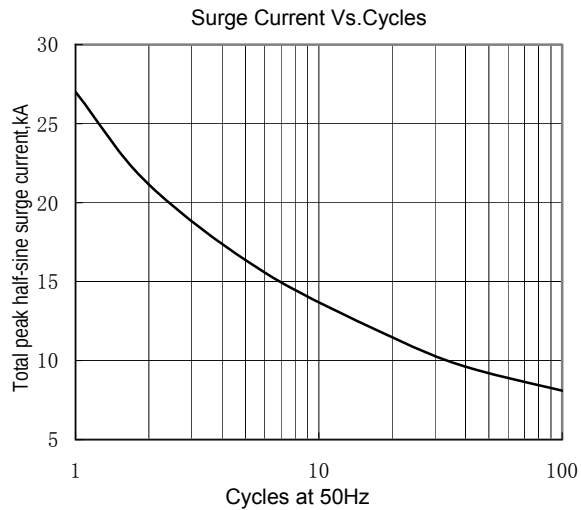


Fig.7

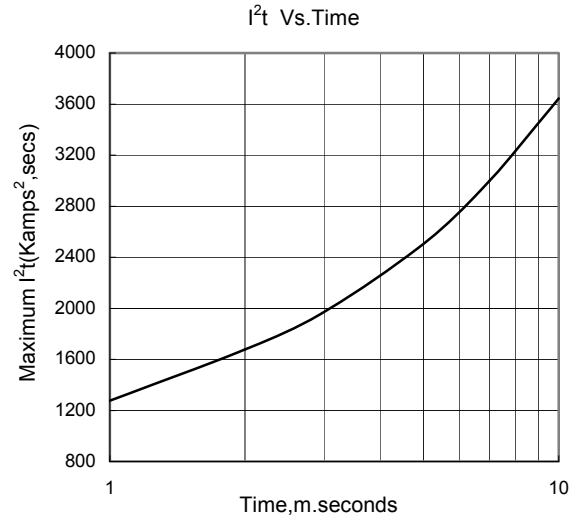


Fig.8

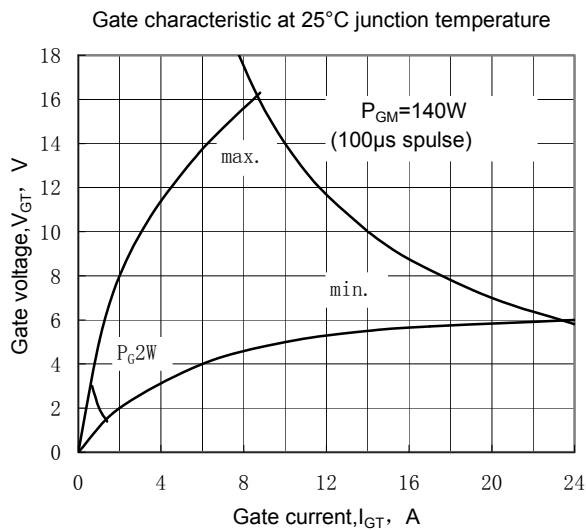


Fig.9

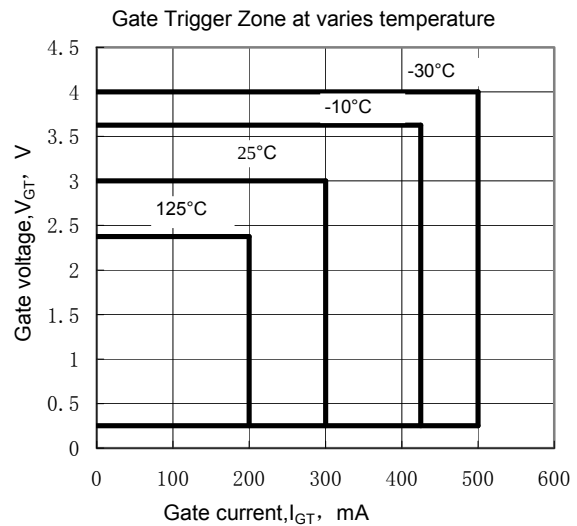


Fig.10

Outline:

